


RELEASE FABRICS & PEEL PLIES

Tygavac has a very comprehensive range of release fabrics and peel plies. These woven fabrics impart a textured surface to the moulded laminate to improve adhesion of subsequent secondary bonding or painting. They are used on the tool face or on the bag side of the laminate.

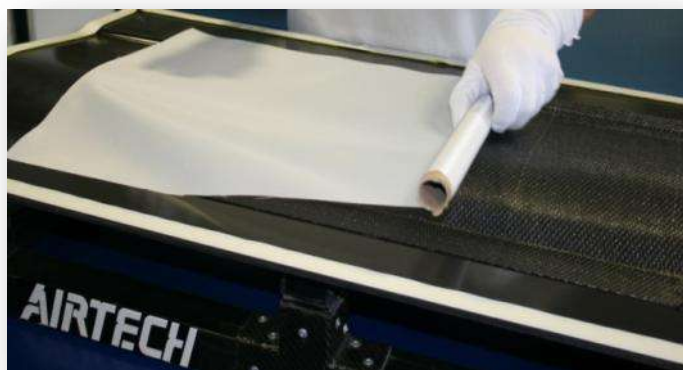

Tygavac release fabrics & peel plies are available with or without coatings to promote easier release. The choice of fabric is dependent on the surface texture required, resin system in use, processing temperature and drape characteristics.

Product Reference	Description	Colour	Weight	Maximum Use °C
Econoply J	Polyester peel ply	Plain White	54 g/m ²	121°C
Econoply E	Polyester peel ply	Plain White	95 g/m ²	149°C
Econostitch	Nylon peel ply	Plain White	88 g/m ²	190°C
Econostitch 5445	Nylon peel ply	White / Red Tracer	100 g/m ²	190°C
Econostitch 66	Nylon peel ply	White / Red Tracer	85 g/m ²	190°C
Econostitch G	Polyester peel ply	White / Black Tracer	85 g/m ²	190°C
Econolease	Coated Nylon peel ply	Light Blue	61 g/m ²	204°C
Release Ply C	Nylon peel ply	Plain White	64 g/m ²	204°C
Release Ply F	Polyester peel ply	Plain White	95 g/m ²	204°C
Release Ply G	Polyester peel ply	Plain White	92 g/m ²	204°C
Stitch Ply G	Polyester peel ply with black tracer	White / Black Tracer	85 g/m ²	204°C
Ultra Ply 22T	Polyester peel ply	Plain White	95 g/m ²	204°C
60B & 60BR	Nylon peel ply uncoated & coated	White & Coated Orange	60 g/m ²	204°C
80A & 80AR	Nylon peel ply uncoated & coated	White & Coated Orange	80 g/m ²	204°C
Release Ply A	Nylon peel ply	Plain White	80 g/m ²	232°C
Release Ply Super A	Nylon peel ply	Plain White	139 g/m ²	232°C
Stitch Ply A	Nylon peel ply with red tracer	White with Black Tracer	88 g/m ²	232°C
Release Ply B	Nylon peel ply	Plain White	62 g/m ²	232°C
Bleederlease A	Coated Nylon peel ply	Green	80 g/m ²	232°C
Bleederlease B	Coated Nylon peel ply	Green	62 g/m ²	232°C
TFG 075P, TFGS 075P	Porous PTFE coated fibreglass	Beige	--	260°C
TFG 075	Non-porous PTFE coated fibreglass	Beige	--	260°C
TFG 125	Non-porous PTFE coated fibreglass	Beige	--	260°C
TFG 250	Non-porous PTFE coated fibreglass	Beige	--	260°C
TFG 250P	Porous PTFE coated fibreglass	Beige	--	260°C



MORE THAN A MANUFACTURER... A TECHNICAL PARTNER

All statements, technical information and recommendations contained in this publication are based on tests believed to be reliable, but their accuracy and / or completeness are not guaranteed. The user shall determine the suitability of the product for his particular purpose and shall assume all risk and liability in connection therewith. All products are sold subject to Tygavac Advanced Materials standard Conditions of Sale.

Tygavac™ is a registered Trade Mark.